Instructions for PA2 Series Photoluminescent Exit Sign

IN THE BOX: Aluminum Photoluminescent Exit Sign, (2) Two Chevrons, Installation Instructions, and Mounting Hardware (Framed Units Only)

CAUTION: EXTERNAL ILLUMINATION SOURCE REQUIRED

Sign must be installed in a location where a minimum of 5-foot candles (54 lux) of fluorescent or LED lighting is available during all times of building occupancy.

INSTALLATION

- Sign must be charged for a minimum of 60 minutes to become operational.
- External illumination (fluorescent or LED lighting) must be dependable and supplied by a circuit**,** not controlled by automatic timers or sensors.
- External illumination source must be powered during all times of building occupancy.
- Light level upon the face of the sign must be reassessed if any changes in external lighting take place.
- Cleaning of the sign must be done with non-abrasive cloth dampened in water.
- Periodic visibility inspections are to be performed regularly and in accordance with applicable installation codes – Refer to NFPA 101 for more information.
- Sign is to be installed indoors ONLY, where it will not be exposed to direct sunlight or water exposure.

CHEVRONS

Sign includes (2) two detachable chevrons which may be applied to clearly demonstrate path of egress.
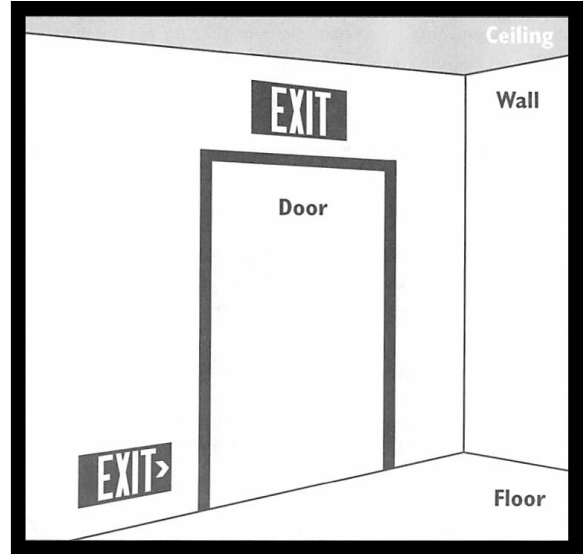
VIEWING DISTANCE

PA2-50: UL 924 Listed for 50-foot maximum legible viewing distance.

PA2-100: UL 924 Listed for 100-foot maximum legible viewing distance.

MOUNTING
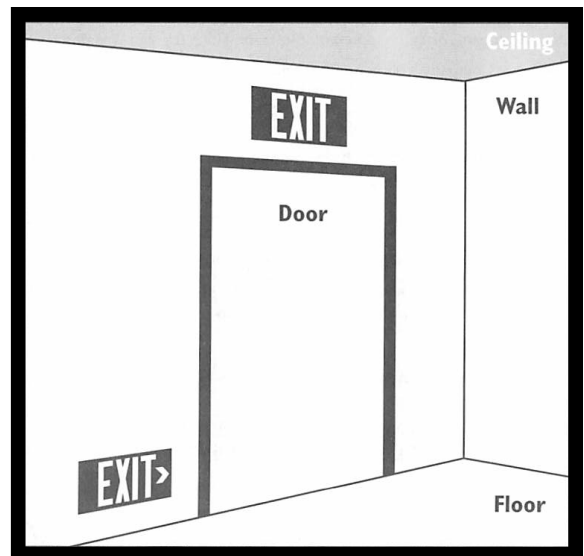
WALL MOUNT INSTALLATION (No Frame)

1. Level and mark hole location on wall using the mounting holes of the exit sign
2. Drill holes on the surface of wall
3. Level and mount back plate to wall using the mounting hardware
4. Insert frame screws (4) through the drilled holes and tighten onto wall
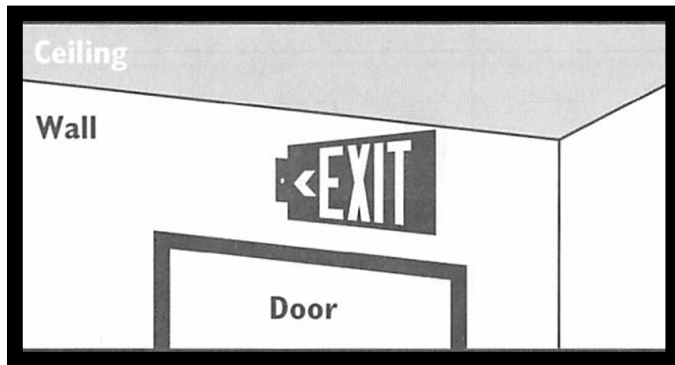5. Apply chevrons as needed (left or right)

Wall Mount

WALL MOUNT INSTALLATION (Framed)

1. Level and mark hole location on wall using the mounting holes on the back of the frame
2. Drill both screws on the surface of wall
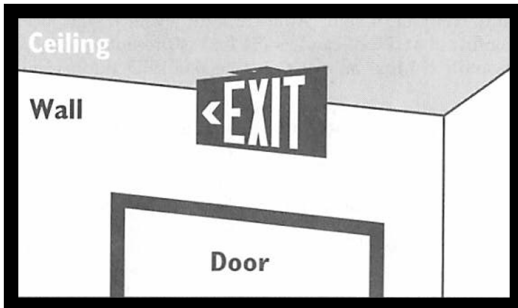3. Mount the frame
4. Apply chevrons as needed (left or right)

Wall Mount

Side Mount

SIDE MOUNT INSTALLATION (Framed)

1. Level and mark hole location on wall using the mounting holes from bracket
2. Drill holes on the surface of wall
3. Level and mount bracket to wall using mounting hardware
4. Snap frame to mounting bracket and tighten using the supplied screws
5. Apply chevrons as needed (left or right)

Ceiling Mount

CEILING MOUNT INSTALLATION

1. Level and mark hole location on ceiling using the mounting holes from bracket
2. Drill holes on the surface of ceiling
3. Level and mount bracket to wall using mounting hardware
4. Snap frame to mounting bracket and tighten using the supplied screws
5. Apply chevrons as needed (left or right)

CODES AND REGULATIONS

- UL924 Listed (Both for 50', 75', and 100' viewing distances)
- Meets current NFPA Life Safety Code 101 and OSHA requirements
- Operation temperature: 0°F to 104°F

-SAVE THESE INSTRUCTIONS FOR FIRE SAFETY INSPECTIONS-

3170 Scott Street
Vista, CA 92081
(P) 877-352-3948
(E) info@exitlightco.com
(W) www.exitlightco.com