

Cast Aluminum Exit Sign

FEATURES

- Housing constructed of precision die-cast aluminum
- 120/277 VAC operation
- Short circuit, voltage surge, brown out and low battery voltage disconnect protected
- Long life, maintenance-free NiCad battery for battery backup units
- LED indicator light with push-to-test switch for battery backup units
- Universal mounting plate
- Knock-out left/right arrows
- Listed for damp location



Clean lines, durable material and energy saving LEDs make this unit on of our best selling exit sign series! Available in a variety of colors to complement your space.

WARRANTY

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



Ordering Information					
Series	Face Color	Housing Color	Sides/Faces	Voltage	Options
CA-R (Red)	Aluminum (incl)	Black (incl)	Single (incl)	120/277 (incl)	USA (Made/Assembled in USA)
CA-G (Green)	B (Black)	Aluminum (A)	Double (D)	220V 50Hz (220V)	ST (Self Testing)
	W (White)	Black (B)			ULC (UL Canada Approved)
		White (W)			

CONFORMANCE TO CODES AND STANDARDS

The CA series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

CONSTRUCTION

The CA series is constructed from spec grade die-cast aluminum housing. Aluminum face with black housing is standard.

ILLUMINATION

The LED series illumination is achieved by use long-lasting, efficient ultra bright red or green LEDs. Color-matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY

The CA series is designed with a maintenance-free NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 20°F (-7°C) to 95°F (35°C).


INSTALLATION

The CA is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

SELF-TESTING OPTION

Unit continuously monitors the AC power, battery supply voltage, emergency lamp condition and charging circuit. If failure is detected, the indicator will show status and correct when adjusted. Unit will automatically perform testing for five minutes every 28 days and 90 minutes every six months.

DIMENSIONS

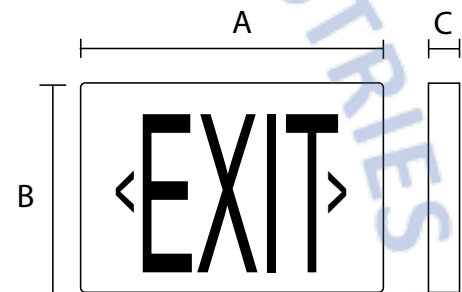

Measurement	A	B	C
	12.75"	9"	2"

lightFIXTURE
INDUSTRIES

1497 Poinsettia Ave, Ste 155, Vista, CA 92081

Phone: 877-534-4621 Fax: 877-534-4624

Email: info@lightfixtureindustries.com