



EXIT LIGHT COMBO - SWIVEL HEAD

Code: COMBOC



The COMBOC Combo Exit Sign offers a lightweight, compact combination fixture. The emergency lights can be rotated from side to top of the fixture to allow for more light coverage and a variety of mounting configurations.



Compatible Battery: BAA-36900

Compatible Remote Head(s): [RHP-L-3V](#), [RHB-L-MV](#), [RHB-WPL-MV](#)

To use with remote heads, please change the **Operation Type** above to **Battery Backup + Remote Head Capable** to ensure compatibility. Code at time of checkout must read: **COMBOC-R-W-RH**.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
COMBOC	R (Red)	W (White)	BB (Battery Backup)

FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Fully adjustable swivel-mount LED lamp heads each equipped with white LEDs
- Universal mounting canopy for top installation, flush mount to wall, or side mount
- Lightweight with snap-together construction for easy installation
- LED status indicator
- Injection molded, impact- and scratch-resistant, corrosion-proof, UL 94 V-0 flame retardant housing
- Push-to-test switch
- Universal transformer for 120/277 VAC operation

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The COMBOC-R series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

CONSTRUCTION

The COMBOC-R series is constructed from injection molded, impact- and scratch-resistant and corrosion-proof UL 94 V-0 flame retardant thermoplastic housing. White housing is standard.

ILLUMINATION

Uses two 1W LED lamp heads. Lamp heads are on track-and-swivel guides. Heads are moveable from side to top of the unit for a wider area of coverage pipe.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The COMBOC-R Combo series is designed with a maintenance-free 3.6V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 50°F (10°C) to 104°F (40°C).

PHOTOMETRICS


Standard mounting height of 7.5ft illuminates 1 footcandle (FC) **spaced at 36ft for a 3ft path of egress.**

REMOTE HEAD CAPABLE OPTION


The remote head capability option allows the COMBOC unit to supply power to up to two additional 3.6V LED remote heads. The unit can supply power to either 2 single head remote lamps or 1 double head remote lamp. The remote heads would then operate on the same emergency mode as the standard units (see Emergency Operation Section).

INSTALLATION

The COMBOC-R is suitable for wall, side or ceiling installation via included mounting plate. Snap together design allows for quick and easy installation.

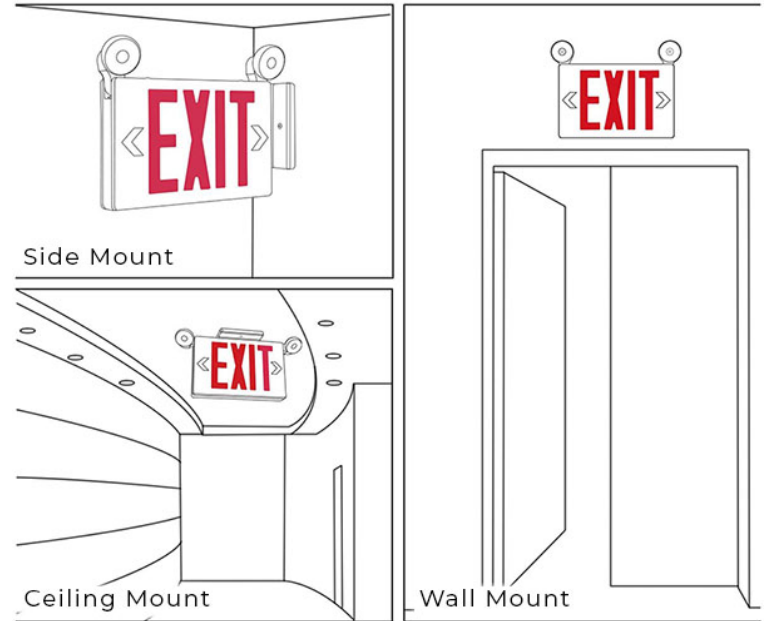

DIMENSIONS

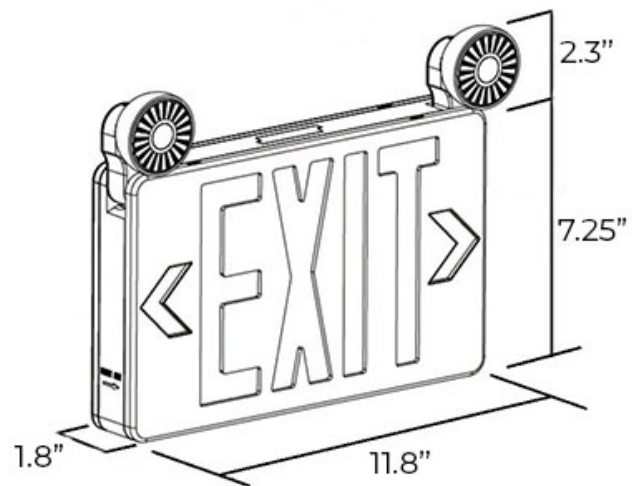

Weight : 4.00 lb