

FEATURES

- UL Listed for factory and field installation
- Compact Design
- Simple Wiring
- Self-Testing (monthly/yearly)
- Constant Output Power
- Built-in Lithium Battery

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



ORDERING INFORMATION

| Series | Wattage |
|-----------|---------|
| EB-LHOUSE | 8W |

CONSTRUCTION

The EB-LHOUSE emergency driver is constructed from durable steel.

ILLUMINATION

The EB-LHOUSE emergency driver features a bright LED strip that puts out bright 5000k light (1000lm).

ELECTRICAL COMPONENTS

| | |
|-----------------|--------------|
| Model No. | EB-LHOUSE-8W |
| Input Voltage | 100-277V AC |
| Brightness | 1000lm |
| Emergency Power | 8W |
| Battery Type | Li-ion |
| Emergency Time | 90 mins |

EMERGENCY OPERATION

The EB-LHOUSE emergency driver provides a minimum of 90 minutes of battery backup time

BATTERY - BATTERY BACKUP

The EB-LHOUSE emergency driver is designed with a 7.4V 2000mAh maintenance-free lithium battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

SELF-TESTING OPTION

OPERATIONAL TEMPERATURE

Temperature Ratings


Standard Option

41°F to 122°F

INSTALLATION

The EB-LHOUSE emergency driver can be installed in different types of indoor troffers, panels, vapor lights, linear lights, most T5 and T8 fixtures. We recommend confirming electrical specs on existing light to make sure the LED Driver is fully compatible.

DIMENSIONS

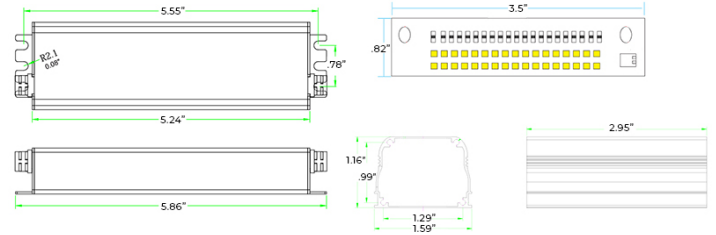

Weight : 5.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com