



FEATURES

- UL Listed for factory and field installation
- Compact Design
- Simple Wiring
- Self-Testing (monthly/yearly)
- Constant Output Power
- Built-in Lithium Battery

ELECTRICAL COMPONENTS

Model No.	EB-LHOUSE-8W
Input Voltage	100-277V AC
Brightness	1000lm
Emergency Power	8W
Battery Type	Li-ion
Emergency Time	90 mins

EMERGENCY OPERATION

The EB-LHOUSE emergency driver provides a minimum of 90 minutes of battery backup time

BATTERY - BATTERY BACKUP

The EB-LHOUSE emergency driver is designed with a 7.4V 2000mAh maintenance-free lithium battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE

Temperature Ratings

Standard Option	41°F to 122°F
-----------------	---------------

CONSTRUCTION

The EB-LHOUSE emergency driver is constructed from durable steel with a red powder coat finish.


ILLUMINATION

The EB-LHOUSE emergency driver features a bright LED strip that puts out bright 5000k light (1000 lumens).

INSTALLATION

The EB-LHOUSE emergency driver can be installed in different types of indoor troffers, panels, vapor lights, linear lights, most T5 and T8 fixtures. We recommend confirming electrical specs on existing light to make sure the LED Driver is fully compatible.

DIMENSIONS

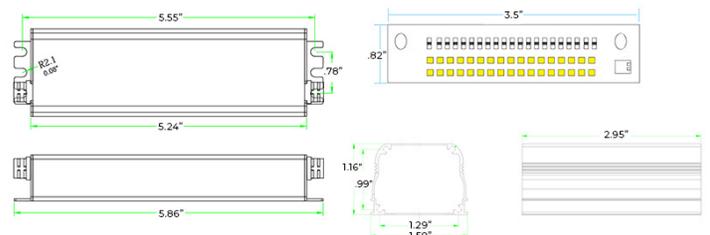

Weight : 5.00 lb