



6" X 24" NON-SLIP PHOTOLUMINESCENT TAPE STAIR TREAD

Code: PTNS624

FEATURES

- Meets Prop 65, ADA, and OSHA Standards
- Emergency Egress/Safety Tape
- Thin gauge polyester with high tack adhesive
- Abrasive, non-slip, high traction surface
- Requires continued exposure to at least 54 LUX illumination
- Indoor use only
- Grit Size: 46

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The PTNS624 meets or exceeds the following codes: Prop 65, ADA, and OSHA standards.

CONSTRUCTION

The PTNS624 stair tape is made from flexible, photoluminescent polyester film coated with a permanent acrylic adhesive. Engineered to exceed requirements for emergency egress and meet the industry's most rigorous standards.


ELECTRICAL COMPONENTS

The PTNS624 egress tape does not require any type of electrical components.

INSTALLATION

The PTNS624 stair tape is designed for indoor safety application such as signage in building, marine, rail, and military applications. The egress tape must be exposed to ambient lighting or natural sunlight. Fluorescent light exposure is the best and fastest charging light.

DIMENSIONS

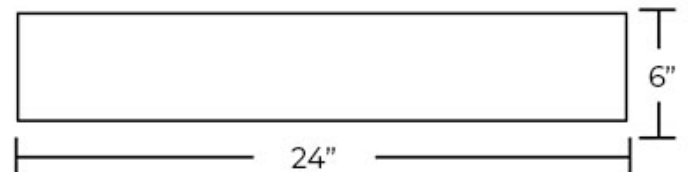

Weight : 3.00 lb