

RED COMBO EXIT LIGHT

Code: ELCCOMBOT-R



LED Exit Sign with Incandescent Lamp heads in a sturdy, modern design unit.



FEATURES

- UL 924 Listed for damp location
- Two adjustable, glare free Incandescent lamp heads
- Injection-molded, high-impact, UL94 V-0 thermoplastic construction
- 120/277 VAC operation
- Universal mounting pattern knock-out in back plate for J-box mounting
- Knock-out left/right arrows
- Maintenance-free 6V sealed lead acid battery
- Two 6V, 5.4W adjustable emergency lighting heads

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Compatible Battery: B6V4A

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
ELCCOMBOT	R (Red)	W (White)	BB (Battery Backup)
			ST (Self Testing)
			RH (Remote Head Capable)

CONSTRUCTION

The ELCCOMBOT-R series is constructed from injection-molded, high-impact, engineering-grade, UV-stabilized, UL 94 V-0 thermoplastic. White housing is standard.

ILLUMINATION

Emergency lamps use glare-free 6V 5.4W Incandescent wedge-base lamps for bright illumination. Long life, energy saving red LEDs illuminate the Exit Sign.

ELECTRICAL COMPONENTS

120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

BATTERY - BATTERY BACKUP

The ELCCOMBOT-R Combo Exit Sign series is designed with a maintenance-free 6V 4.5Ah Sealed Lead Acid battery that provides an emergency duration of 180 minutes or 90 minutes if additional remote heads are added. Recharge time of the battery is 24 hours.

SELF-TESTING OPTION

Unit continuously monitors the AC power, battery supply voltage, emergency lamp condition and charging circuit. If failure is detected, the indicator will show status and correct when adjusted. Unit will automatically perform testing for five minutes every 28 days and 90 minutes every six months.


REMOTE HEAD CAPABLE OPTION

The remote head capability option allows the COMBOT unit to supply power to up to two additional 6V 5.4 Incandescent heads. The remote heads would then operate on the same emergency mode as the standard units (see Emergency Operation Section).

INSTALLATION

The ELCCOMBOT-R is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

DIMENSIONS

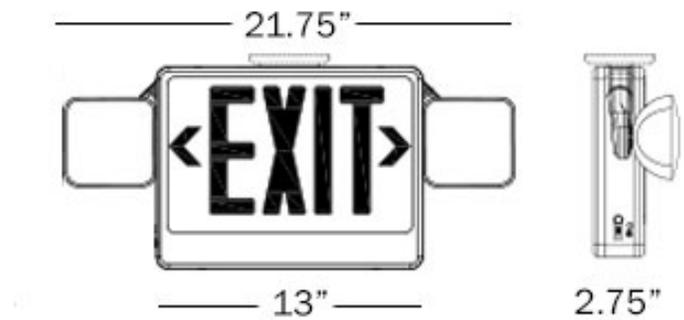

Weight : 7.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com