

Emergency Light MR16 Lamps High Output

FEATURES

- 50 Watt capacity emergency light
- Self testing included
- White injection molded, UL 94VO flame rated thermoplastic housing
- Fully adjustable 6V 6W MR16 lamps standard
- 120/277V operation
- Test switch and charge rate indicator light
- Low voltage disconnect protection
- Fast wall or ceiling installation



WARRANTY

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Low voltage MR16 halogen lamps are featured in this high-capacity emergency lighting unit. White polycarbonate housing with a UL 94 VO flame rating offers durability and snap together design allows for fast installation.



Ordering Information		
Series	Housing Color	Options
EL-TMR16HO	White (W)	ST (Self Testing)

CONFORMANCE TO CODES AND STANDARDS

The EL-TMR16HO series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

CONSTRUCTION

The EL-TMR16HO series is constructed from injection-molded thermoplastic ABS housing. UL 5VA flame rating. Two fully adjustable glare-free eyeball shape light heads for emergency light.

ILLUMINATION

2 X 6V 3.5W MR-16 Lamps for emergency mode.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY

The EL-TMR16HO series is designed with a maintenance-free Sealed Lead Acid battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.


INSTALLATION

The EL-TMR16HO is suitable for surface wall or side mounting. Easily removed mounting knock-outs and J-box pattern on back panel.

SELF-TESTING OPTION

Unit continuously monitors the AC power, battery supply voltage, emergency lamp condition and charging circuit. If failure is detected, the indicator will show status and correct when adjusted.

DIMENSIONS

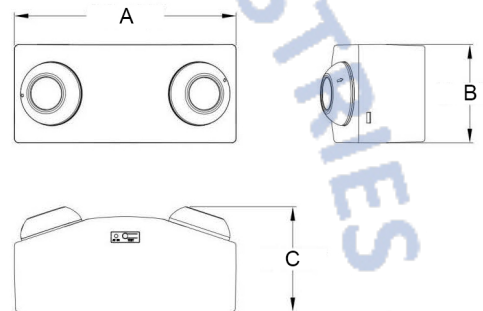

Measurement	A	B	C
	12.125"	5.5"	5.875"

lightFIXTURE
INDUSTRIES

1497 Poinsettia Ave, Ste 155, Vista, CA 92081

Phone: 877-534-4621 Fax: 877-534-4624

Email: info@lightfixtureindustries.com