

FEATURES

- ADA Compliant
- Rigid Plastic
- Explosion proof
- No power or wiring required
- Indoor use only
- Peel off back adhesive strips

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

These bathroom signs help your employees and visitors easily locate your facilities with bold white letters on a black background for maximum visibility..

Conformance to Codes and Standards

Meets and Conforms with ADA regulations.

ORDERING INFORMATION

Series	Signage Type
ADA-MHC	BLA-A-HC (Black - All Gender - Handicap Accesible)
	BLA-A-NA (Black - All Gender)
	BLA-M-HC (Black - Men - Handicap Accesible)
	BLA-M-NA (Black - Men)
	BLA-W-HC (Black - Women - Handicap Accesible)
	BLA-W-NA (Black - Women)
	BLU-A-HC (Blue - All Gender - Handicap Accesible)
	BLU-M-HC (Blue - Men - Handicap Accesible)
	BLU-W-HC (Blue - Women - Handicap Accesible)

CONSTRUCTION

The ADA-MHC series sign is constructed from rigid acrylic material.

ELECTRICAL COMPONENTS

The ADA-MHC series sign does not require any type of electrical components.

BATTERY - BATTERY BACKUP

The braille signs do not require any type of battery.

INSTALLATION


These signs come with self-adhesive strips on the back of each sign. Simply peel the thin cover from these adhesive strips and place your sign on any smooth, flat surface.

Below are some genral mounting requirements, however, always check with your local building authority for regulations and updates:

703.4 Installation Height and Location. Signs with tactile characters shall comply with 703.4.

703.4.1 Height Above Finish Floor or Ground. Tactile characters on signs shall be located 48 inches (1220 mm) minimum above the finish floor or ground surface, measured from the baseline of the lowest tactile character and 60 inches (1525 mm) maximum above the finish floor or ground surface, measured from the baseline of the highest tactile character..

DIMENSIONS

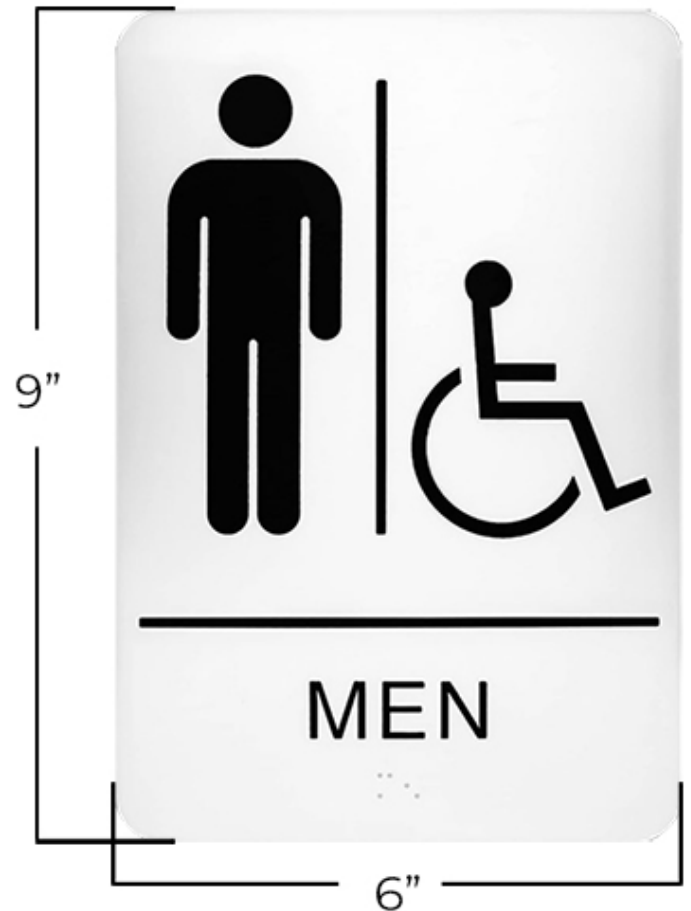

Weight : 2.00 lb