



FEATURES

- UL924, ETL, NFPA 101 Life Safety Code & NEC
- Rugged 20 gauge steel Housing
- Universal 120/277 VAC (60Hz) input
- Includes two round adjustable LED lamp heads
- Brown-out protection
- Automatic low voltage disconnect (LVD)
- Push-to-test switch
- Charge rate / power-on indicator light

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The EL-MUS series is UL listed and meets or exceeds the following: UL924, ETL, NEC, and NFPA 101 Life Safety Code.

The **EL-MUS Emergency Light** is a rugged, high-performance unit built for reliable emergency illumination in commercial and industrial settings. It features a universal 120/277V input, fully automatic solid-state charger, and advanced protections including AC lockout, brownout, and low-voltage disconnect. With easy front access for maintenance, LED status indicators, and optional remote testing, the EL-MUS ensures dependable operation. Its durable steel housing, available in white or black, encloses efficient LED lamp heads powered by a long-life, maintenance-free battery that provides at least 90 minutes of illumination. Proudly **Made in the USA**, it delivers strength, efficiency, and reliability when it's needed most.



Compatible Battery: [B6V12A](#)

ORDERING INFORMATION

Series	Housing Color	Operation Type
EL-MUS	W (White)	BB (Battery Backup)
	B (Black)	

CONSTRUCTION

The EL-MUS Steel Emergency Light is constructed of heavy duty steel with a bright white finish or options black housing. Available with round MR16 style LED lamp heads.

ILLUMINATION

This heavy duty emergency light is supplied with two front mounted MR16 style LEDs. Both lamps are fully adjustable for optimal lighting.

ELECTRICAL COMPONENTS

Dual 120/277V 60Hz input, with brownout protection. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.


BATTERY - BATTERY BACKUP

The EL-MUS Series has a long life 6V SLA battery. Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

INSTALLATION

Easy installation with front access to all components. Suitable for wall installations.

DIMENSIONS

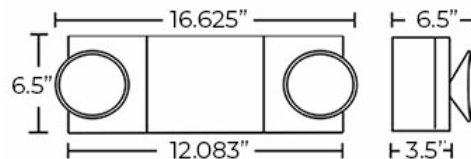

Weight : 12.00 lb