

ULTRA-SLIM CAST ALUMINUM EXIT SIGN

Code: ELCCASLIM



Attractive, functional, architectural and ultra-slim design that fits into any environment. Works on either 120 or 277 VAC. Faceplate includes knock-out left/right arrows for directional indication. Included canopy mount allows both top or end installation.



FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Listed for damp location
- Universal 120/277 VAC operation
- Ultra-low profile unit
- Precision die cast aluminum construction
- Low-profile canopy included (allows nearly flush ceiling or end mounting)
- Chevron style universal arrow knock-outs
- Push-to-test switch with Charge rate / power on LED indicator light
- NON CEC Compliant

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCCASLIM series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter	Housing Color	Operation Type	Sides
ELCCASLIM	R (Red)	A (Aluminum)	BB (Battery Backup)	S (Single)
	G (Green)	B (Black)	AC (AC Only)	D (Double)
		W (White)		

CONSTRUCTION

The ELCCASLIM series is constructed from spec grade die-cast aluminum with a low profile, thin design. Aluminum face with black housing is standard.

ILLUMINATION

The ELCCASLIM illumination is achieved by use long-lasting, efficient ultra bright red or green LEDs. Color-matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

The ELCCASLIM-R series is designed with a maintenance-free 2.4V long life, NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.


BATTERY - BATTERY BACKUP

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

INSTALLATION

The ELCCASLIM is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

DIMENSIONS

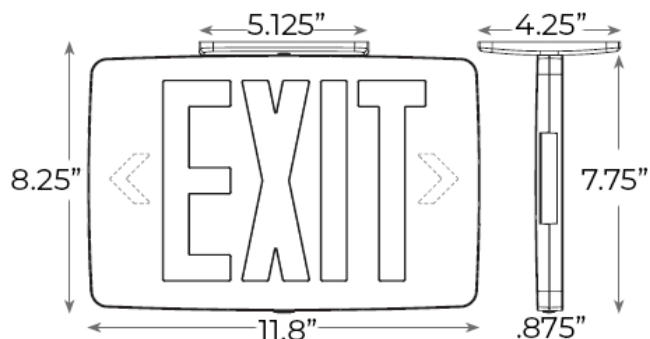

Weight : 8.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com