



# CHICAGO APPROVED RED LED EXIT SIGN

Code: ELCCHEx



City of Chicago approved exit sign with steel housing and glass face. Now standard with energy saving LED illumination instead of incandescent lamps.



## FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- City of Chicago approved
- Now uses LEDs for improved energy efficiency
- Open-face glass panel, silk-screen letters
- 20 gauge steel housing with white powder coat finish
- Universal mounting canopy included for side, top and flush mounting (add 2" for canopy)
- Integrated solid state system, lock out, low voltage battery cutoff, dual voltage 120/277
- NON CEC Compliant

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The ELCCHEx series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

## ORDERING INFORMATION

Series	Operation Type	Signage	Arrows	Options
ELCCHEx	AC (AC Only)	EXIT	N (None)	DS (Double Sided)
	BB (Battery Backup)	STAIRS	L (Left)	
			R (Right)	
			LR (Left & Right)	

Example: ELCCHEx-BB-EXIT-N-DS

## CONSTRUCTION

The ELCCHEx series is constructed from durable 20-gauge steel. Unique design allows double face conversion on field.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


## BATTERY - BATTERY BACKUP

The ELCCHEx series is designed with a maintenance-free battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## INSTALLATION

The ELCCHEx is suitable for ceiling and end mount via steel mounting canopy.

## DIMENSIONS

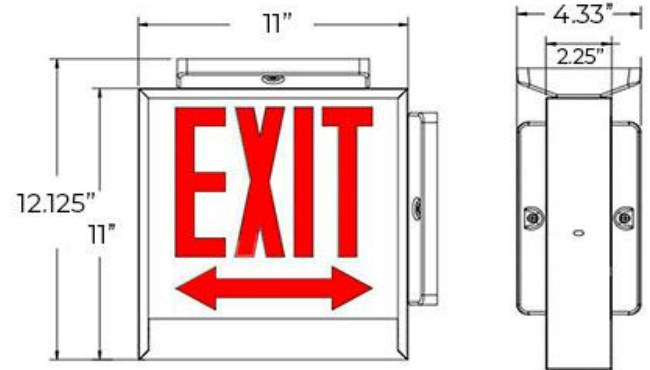

Weight : 10.00 lb

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com