



ASSEMBLED IN THE USA COMBO EXIT LIGHT

Code: ELCCOMBO-USA

FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Listed for damp location
- LED Exit Illumination. Uses 6V SLA Battery.
- Two fully adjustable, glare-free Incandescent lighting heads
- Injection molded, 5VA flame retardant thermoplastic housing
- 120/277 VAC operation
- Universal mounting plate
- Knock-out left/right arrows
- LED indicator light with push-to-test switch

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



Compatible Battery: B6V4A

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Optional Items
ELCCOMBO-USA	R (Red)	W (White)	BB (Battery Backup)	SP (Change to Spanish Letters)
	G (Green)	B (Black)	ST (Self Testing)	3F (3' Cord)
			RH (Remote Head Capable)	

CONSTRUCTION

The ELCCOMBO-USA series is constructed from injection-molded, high-impact, engineering-grade, 5VA flame retardant thermoplastic. White housing is standard.

ILLUMINATION

Emergency lamps use bright Incandescent lighting. Heads are made with smooth thermoplastic reflectors and plastic lens for optimal light distribution. Ultra-Bright, energy efficient Red or Green LED Exit Sign illumination.

ELECTRICAL COMPONENTS

120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

BATTERY - BATTERY BACKUP

The ELCCOMBO-USA series is designed with a 6V Sealed Lead Acid (SLA) battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

SELF-TESTING OPTION

Unit continuously monitors the AC power, battery supply voltage, emergency lamp condition and charging circuit. If failure is detected, the indicator will show status and correct when adjusted. Unit will automatically perform testing for five minutes every 28 days and 90 minutes every six months.


REMOTE HEAD CAPABLE OPTION

The remote head capability option allows the ELCCOMBO-USA unit to supply power to up to two additional Incandescent remote heads up to 11 total watts. The remote heads would then operate on the same emergency mode as the standard units.

INSTALLATION

The ELCCOMBO-USA is suitable for surface wall and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

DIMENSIONS

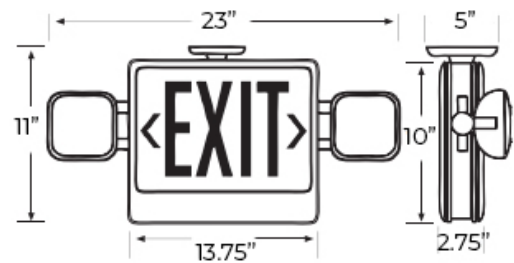

Weight : 8.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com