

# EXIT LIGHT COMBO - SWIVEL HEAD

Code: ELCCOMBOC



The ELCCOMBOC Combo Exit Sign offers a lightweight, compact combination fixture. The emergency lights can be rotated from side to top of the fixture to allow for more light coverage and a variety of mounting configurations.



**Compatible Battery:** BAA-36900

## FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Fully adjustable swivel-mount LED lamp heads each equipped with white LEDs
- Universal mounting canopy for top installation, flush mount to wall, or side mount
- Lightweight with snap-together construction for easy installation
- LED status indicator
- Injection molded, impact- and scratch-resistant, corrosion-proof, UL 94 V-0 flame retardant housing
- Push-to-test switch
- Universal transformer for 120 or 277 VAC operation

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The ELCCOMBOC series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

## ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
ELCCOMBOC	R (Red)	W (White)	BB (Battery Backup)

## CONSTRUCTION

The ELCCOMBOC series is constructed from injection molded, impact- and scratch-resistant and corrosion-proof UL 94 V-0 flame retardant thermoplastic housing. White housing is standard.

## ILLUMINATION

Uses two 1W LED lamp heads. Lamp heads are on track-and-swivelguides. Heads are movable from side to top of the unit for a wider area of coverage pipe.

## ELECTRICAL COMPONENTS

Dual voltage input 120/347 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


## BATTERY - BATTERY BACKUP

The ELCCOMBOC Combo series is designed with a maintenance-free 3.6V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 50°F (10°C) to 104°F (40°C).

## INSTALLATION

The ELCCOMBOC is suitable for wall, side or ceiling installation via included mounting plate. Snap together design allows for quick and easy installation.

## DIMENSIONS

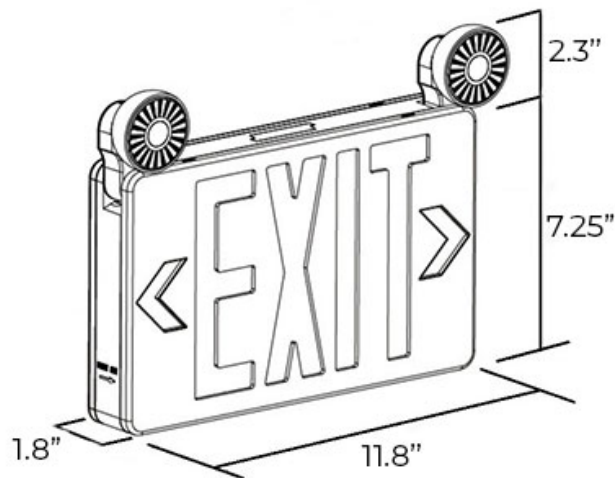

Weight : 4.00 lb

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com