

# CAST ALUMINUM EXIT SIGN / EMERGENCY LIGHT

Code: ELCCOMBOCA



The ELCCOMBOCA series offers a lightweight, compact combination fixture. The emergency lights can be rotated from side to side and up to down to allow for more light coverage and a variety of mounting configurations.



## FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Damp Location rated
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Two fully adjustable, glare-free LED lighting heads
- Universal 120/277 VAC operation
- Die cast mounting canopy included (allows top, end or back mount)
- Universal wall mounting knock-out pattern
- LVD (low voltage disconnect prevents battery from deep discharge)
- Spec grade faceplate and premium housing
- Universal knock-out chevrons
- Push-to-test switch
- Charge rate / power on LED indicator light

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The ELCCOMBOCA series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

## ORDERING INFORMATION

Series	Letter	Housing Color	Operation Type	Sides
ELCCOMBOCA	R (Red)	A (Brushed Aluminum)	BB (Battery Backup)	S (Single)
	G (Green)	W (White)		D (Double)

## CONSTRUCTION

Unique modern design provides spec-grade EXIT sign with LED lamp heads in one low-profile, premium grade aluminum housing unit.

## ILLUMINATION

Uses two 1W high performance premium grade, ultra-bright white LED lamps.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## BATTERY - BATTERY BACKUP

The ELCCOMBOCA Combo Aluminum Exit Sign is designed with a maintenance-free 8.4V 1700mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.


## PHOTOMETRICS

At a mounting height of 7.5ft, multiple units illuminate 1 FC spaced at 16ft for a 3ft path of egress and spaced at 12ft for a 6ft path of egress.

## INSTALLATION

The ELCCOMBOCA is suitable for wall, side or ceiling installation via included mounting plate. Snap together design allows for quick and easy installation.

## DIMENSIONS

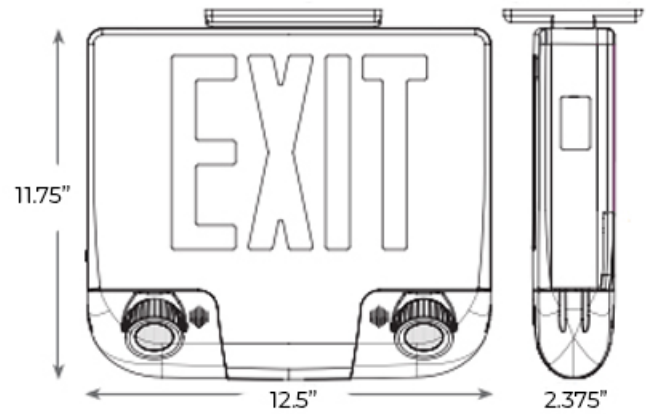

Weight : 10.00 lb

