

LED RUNNING MAN PIPE LIGHT COMBO EXIT SIGN

Code: ELCCOMBORM-LP



The ELCCOMBORM-LP series combines a low profile traditional design and dependable LED lighting illumination for an attractive and affordable solution.



Compatible Battery: BAA-48R900

FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Ultra-Bright, Energy efficient, All LED fixture
- 120 or 347 VAC operation
- Injection-molded, VO flame retardant, high impact housing
- Charge rate / power on LED indicator light
- Long life, energy saving LED lamps
- Listed for damp location
- Universal mounting canopy for top or side installation
- CSA Listed
- Replacement battery BAA-48R900 (see related products)
- 3-5 Day Lead Time

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCCOMBORM-LP series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements, CSA C22.2 No. 141.10 Standard requirements for Emergency lighting equipment

ORDERING INFORMATION

Series	Housing Color	Operation Type
ELCCOMBORM-LP	W(White)	BB (Battery Backup)
		ST (Self Testing)
		RH (Remote Head Capable)

CONSTRUCTION

The ELCCOMBORM-LP series is constructed from injection molded, 5VA flame retardant, high impact thermoplastic housing. White housing is standard.

ILLUMINATION

The ELCCOMBORM-LP series illumination is achieved by use long-lasting, efficient ultra bright green LEDs. Color-matched diffuser eliminates hot spots and striations, providing optimal light output. 4.5W (36 LEDs x 0.125 watts) per light pipe.

ELECTRICAL COMPONENTS

Dual voltage input 120/347 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The ELCCOMBORM-LP series is designed with a maintenance-free NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 32°F (0°C) to 122°F (50°C).


SELF-TESTING OPTION

Unit continuously monitors the AC power, battery supply voltage, emergency lamp condition and charging circuit. If failure is detected, the indicator will show status and correct when adjusted. Unit will automatically perform testing for five minutes every 28 days and 90 minutes every six months.

INSTALLATION

The ELCCOMBORM-LP is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation. Left, Right, and No Arrow pictogram legends included.

DIMENSIONS

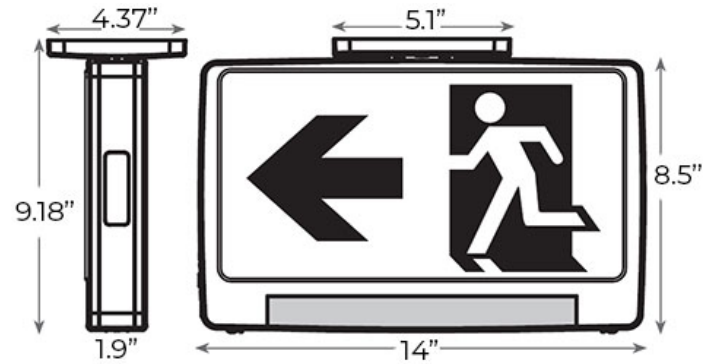

Weight : 5.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com