


### FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Meets CSA C22.2 No. 141-02 Requirements for unit equipment
- Listed for damp location
- Two fully adjustable, 5.4 watt, glare free incandescent lamp heads
- LED indicator light with push-to-test switch
- Lightweight, injection molded, 5VA flame retardant thermoplastic housing
- 120/277 VAC operation
- Universal mounting plate

### WARRANTY INFORMATION

Any component that fails due to manufacturer’s defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

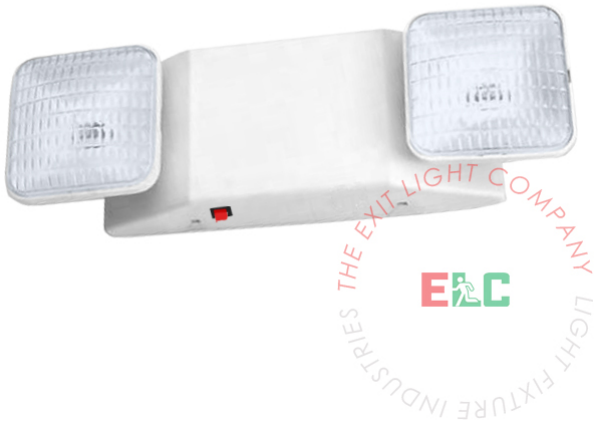

A standard emergency light assembled in the USA.



**Compatible Battery:** B6VA

### ORDERING INFORMATION

Series	Housing Color	Operation Type
EL-USA	W (White)	BB (Battery Backup)
		ST (Self Testing)
		RH (Remote Head Capable)

## CONSTRUCTION

The EL-USA is constructed from injection-molded, engineer-grade, 5VA flame retardant thermoplastic. White housing is standard. Substantial transformation assembly in the US complies with “Assembled in the USA” under the Buy American Act.

## ILLUMINATION

EL-USA emergency light is equipped with 2 fully adjustable 5.4W glare free lamp heads. Both lenses have a smooth thermoplastic reflector and a plastic lense for optimal lighting distribution.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## BATTERY - BATTERY BACKUP

The EL-USA series is designed with a maintenance-free 6V SLA battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## PHOTOMETRICS

Standard mounting height of 7.5ft illuminates 1 foot-candle (FC) over a distance of 17ft on a 3ft path of egress and 13ft on a 6ft path of egress. At a mounting height of 7.5ft, multiple units illuminate 1 FC spaced at 18ft for a 3ft path of egress and spaced at 14ft for a 6ft path of egress.

## SELF-TESTING OPTION

Continuously monitors the AC power, battery supply voltage, emergency lamp and charging circuit. The multi-color LED indicator light will indicate failure and adjust when it has been corrected. This feature will test the unit for five minutes every 28 days and 90 minutes every six months.

## OPERATIONAL TEMPERATURE

Operational temperature range is 68°F to 122°F.


## REMOTE HEAD CAPABLE OPTION

The remote head capability option allows the EL-USA unit to supply power to up to two additional remote heads. The remote heads would then operate on the same emergency mode as the standard units (see Emergency Operation Section).

## INSTALLATION

The EL-USA is suitable for wall or ceiling mount. Snap together design allows for quick and easy installation. Conduit mount knockout on top of housing and back plate.

## DIMENSIONS

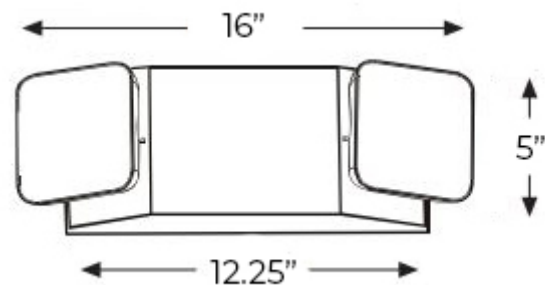

Weight : 6.00 lb

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
[info@exitlightco.com](mailto:info@exitlightco.com)