



DECORATIVE EDGE LIT EXIT SIGN

Code: ELCELSMP2



The ELCELSMP2 Exit Sign is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.



Compatible Battery: BAA-48R

FEATURES

- UL 924, NEC, OSHA, and NFPA 101 Life Safety Code
- Listed for damp location
- 120 or 277 VAC operation
- Compact low profile design
- Push-to-test switch
- Universal mount kit includes bracket for pendant mount
- V-5 Flame retardant, high impact thermoplastic housing
- Automatic, low voltage disconnect
- Field installable directional indicators
- NON CEC Compliant

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCELSMP2-R is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Sides
ELCELSMP2	R (Red)	S (Silver)	BB (Battery Backup)	S (Single Sided)
				DS (Double Sided)

CONSTRUCTION

The ELCELSMP2 Exit Sign is constructed from injection-molded, engineering-grade 5VA, flame retardant, high-impact resistant thermoplastic housing in aluminum.

ILLUMINATION

Ultra-bright, energy efficient, long-life Red LED. UV stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination. Double face utilizes factory installed silver mylar background panel.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.


EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The ELCELSMP2 LED Exit Sign is designed with a maintenance-free 4.8V 600mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 50°F (10°C) to 104°F (40°C).

DIMENSIONS

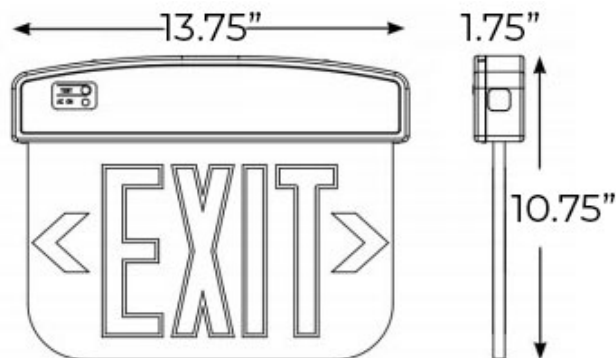

Weight : 6.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com