

STEEL EMERGENCY LIGHT - NEW YORK CITY APPROVED

Code: ELCEL-ST9W



Steel Housing Emergency Light - Approved for New York City. Heavy Duty Construction. An efficient and secure 6-Volt Heavy Duty Emergency Light, unit comes with two 9 watt heads.



FEATURES

- UL924, ETL, NFPA 101 Life Safety Code & NEC
- Approved for New York City Code requirements
- Rugged 20 gauge steel Housing
- Universal 120/277 VAC (60Hz) input
- Includes two round adjustable 6V 9 watts lamp heads
- Brown-out protection
- Automatic low voltage disconnect (LVD)
- Push-to-test switch
- Charge rate / power-on indicator light

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCEL-STBE9W series is UL listed and meets or exceeds the following: UL924, ETL, NFPA 101 Life Safety Code & NEC

ORDERING INFORMATION

Series	Housing Color	Operation Type	Lamp Head Type
ELCEL-ST9W	W (White)	BB (Battery Backup)	BE (Bug Eye)
			SQ (Square)

CONSTRUCTION

The ELCEL-ST9W Steel Emergency Light is constructed of heavy duty steel with a bright white finish. Available with Square or Circular Incandescent lamp heads.

ILLUMINATION

This heavy duty emergency light is supplied with two front mounted PAR36 type heads with 7.2 watt wedge base lamps or rectangular heads.

ELECTRICAL COMPONENTS

Dual 120/277 voltage with brownout protection. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.


BATTERY - BATTERY BACKUP

The ELCEL-ST9W Series has a long life valve regulated lead acid battery. Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

INSTALLATION

Easy installation with front access to all components.

DIMENSIONS

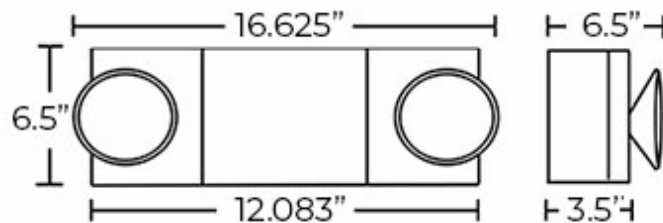

Weight : 12.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com