




CUSTOM SIGNAGE EXIT SIGN

Code: ELCEX-CU

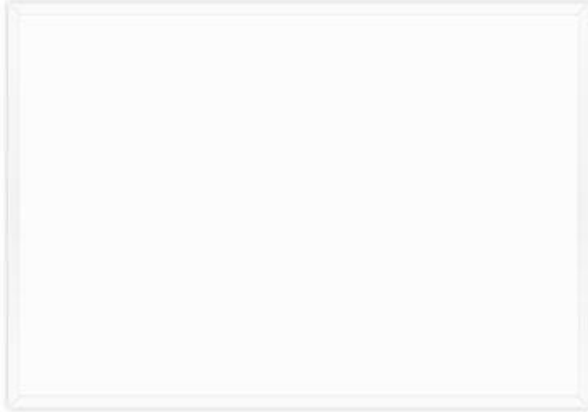

FEATURES

- Mounting bracket for ceiling, wall mount (flag pole style) or flush mount included
- Injection-molded, VO flame retardant, high impact housing
- Constant uniform illumination
- 120/277VAC
- Short circuit protection / voltage surge protection
- Lead time varies based on design, please be prepared to provide PDF file of logo
- Green LEDs and black housing available upon request

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

The ELCEX-CU series combines traditional exit sign design and dependable LED lighting for an attractive and affordable solution to your custome signage needs.



ORDERING INFORMATION

Series	Letter Color	Operation Type	Options
ELCEX-CU	R (Red)	BB (Battery Backup)	S (Single Sided)
	G (Green)	AC (AC Only)	D (Double Sided)

ELCEX-CU-R-BB-S

CONSTRUCTION

The ELCEX-CU series is constructed from injection molded, V-0 flame retardant, high impact thermoplastic housing. White housing is standard. Available in black housing.

ILLUMINATION

The ELCEX-CU series illumination is achieved by use of long-lasting, efficient ultra bright red or green LEDs.

ELECTRICAL COMPONENTS

Dual voltage input 120/277VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


BATTERY - BATTERY BACKUP

The ELCEX-CU series is designed with a maintenance-free 4.8V 700mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 20°F (-7°C) to 95°F (35°F).

INSTALLATION

The ELCEX-CU is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation.

DIMENSIONS

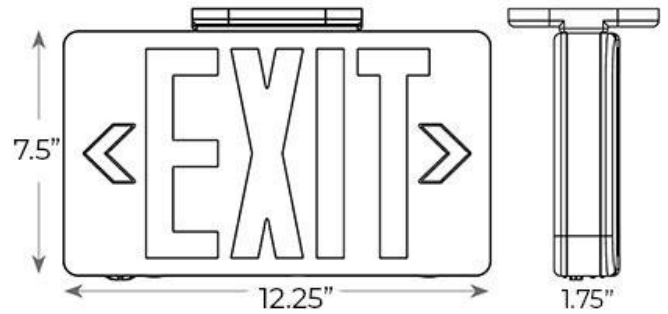

Weight : 5.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com