

STEEL LED EXIT SIGN

Code: ELCEXST



The ELCEXST Steel Exit Sign works on either 120 or 277 VAC. Faceplate includes knock-out left/right arrows. Allows top, lateral or flush mount installation. Fixture is 1 or 2 sided.



Compatible Battery: BAA-48R

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
ELCEXST	R (Red)	W (White)	BB (Battery Backup)
	G (Green)		AC (AC Only, No battery)

FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code
- Listed for damp location
- Push-to-test switch (Battery Backup Only)
- 120 or 277V operation
- Rugged high impact steel with powder coat finish
- Charge rate / power on LED indicator light
- Long life, energy saving LED lamps
- Universal mounting canopy for top or side installation
- 4.8V 700mAh NiCad battery
- NON CEC Compliant

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCEXST Sign is UL listed and meets or exceeds the following: UL 924, NEC and NFPA 101 Life Safety Code requirements.

CONSTRUCTION

The ELCEXST Exit Sign is constructed with a Rugged Steel Housing and Powder Coat Finish (High Impact)

ILLUMINATION

Illumination is achieved by use long-lasting, high intensity red or green LEDs. Color-matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


BATTERY - BATTERY BACKUP

The ELCEXST Steel Exit Sign is designed with a maintenance-free NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 20°F (-7°C) to 95°F (35°C).

INSTALLATION

The ELCEXST LED Exit Sign is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

DIMENSIONS

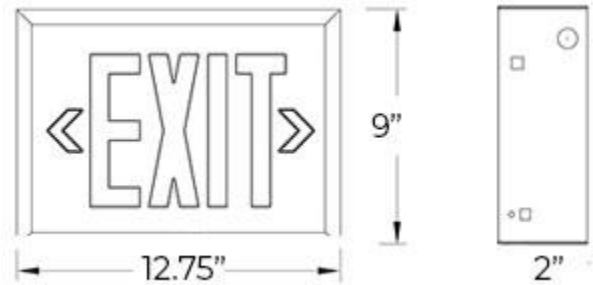

Weight : 6.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com