

ULTRA THIN EXIT SIGN

Code: ELCLEDT



Compatible Battery: BAA-12

FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code
- Listed for damp location
- **ULTRA THIN** injection-molded, VO flame retardant, high impact housing
- Push-to-test switch
- 120 or 277 VAC operation
- Charge rate / power on LED indicator light
- Universal mounting canopy for top or side installation
- NON CEC Compliant

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCLEDT is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Sides
ELCLEDT	G (Green)	W (White)	BB (Battery Backup)	S (Single Sided)
				DS (Double Sided)

CONSTRUCTION

The ELCL EDT LED Exit Sign is constructed from injection molded, high impact V-O flame retardant thermoplastic housing. White housing is standard.

ILLUMINATION

Long-Lasting, efficient Green LED's.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.


BATTERY - BATTERY BACKUP

The ELCL EDT Exit Sign is designed with a maintenance-free 4.8V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 32°F (0°C) to 122°F (50°C).

INSTALLATION

The ELCL EDT is suitable for surface wall, top and ceiling mounting via included canopy. Quick connect installation design allows for quick and easy installation. Knock-out chevrons for customized egress signage and field adjustable.

DIMENSIONS

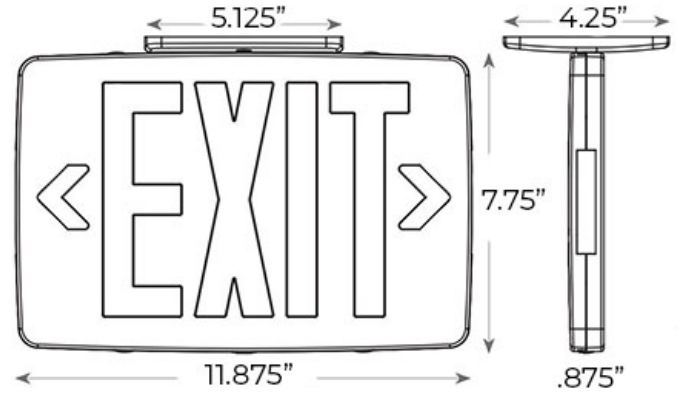

Weight : 5.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com