

NYC APPROVED COMBO EXIT LIGHT

Code: ELCNYCOMBO2



New York City Approved Exit/Emergency Light Combo with LED Energy Savings.



FEATURES

- Dual-voltage input 120V/277V
- Maintenance-free sealed lead-acid battery
- 20-gauge die-formed cold-rolled steel housing
- White corrosion-resistant polyester powder-coat paint with knock-outs for installation
- UL 924 listed for damp location
- Two factory-installed thermoplastic-enclosed lamp heads
- DOE & CEC Registered
- In stock and ready to ship

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The ELCNYCOMBO2 series is UL listed and meets or exceeds the following: UL 924, UL listed, NFPA 101 Life Safety Code, NEC, OSHA requirements and DOE & CEC Registered.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Heads
ELCNYCOMBO2	R (Red)	W (White)	BB (Battery Backup)	2H (2 Heads)
		B (Black)		3H (3 Heads)

CONSTRUCTION

The ELCNYCOMBO2 series is constructed of 20-gauge die formed cold rolled steel housing.

ILLUMINATION

The ELCNYCOMBO2 series uses ultra bright, energy efficient red LED's. Features 2 fully adjustable incandescent lamp heads. (3rd head is optional)

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.


EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

INSTALLATION

The ELCNYCOMBO2 series unit is suitable for surface wall and end mounting. Suitable for indoor installation.

DIMENSIONS

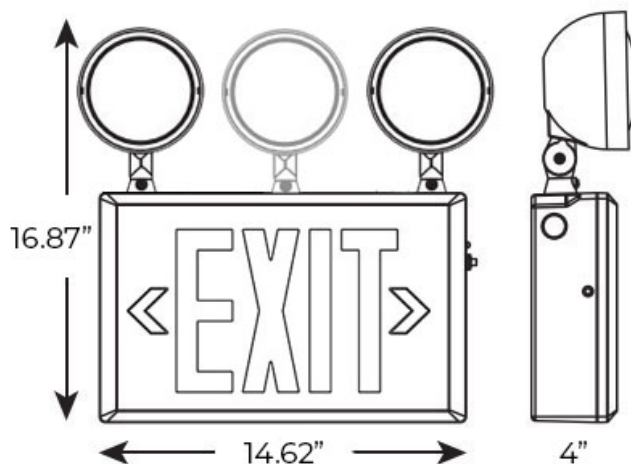

Weight : 18.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com