



# 75' VIEW PHOTOLUMINESCENT EXIT SIGN

Code: ELCPA75



75' Viewing Distance! Extremely durable, flame retardant and non toxic plastic. ETL Listed to meet UL 924. No electricity or battery required. Provides 90+ minutes of illumination.



## FEATURES

- UL 924, OSHA, ETL Listed and NFPA 101 Life Safety Code
- Listed for damp location
- No electricity, no batteries required
- Long life, corrosion-proof construction
- Field applied directional chevrons
- Requires 54 LUX (5-ft candles) of fluorescent, metal halide or mercury vapor light to charge material for 60 minutes
- Designed for surface, flag and ceiling mount
- Produced on durable ABS plastic, both high and low location approved
- Indoor installation only, do not expose to direct sunlight
- No future hazmat disposal needed
- Optional frame available

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The ELCPA75 series is UL listed and meets or exceeds the following: UL 924, OSHA / NFPA 101 Life Safety Code requirements

## ORDERING INFORMATION

Series	Sign Color	Frame	Sides	Options
ELCPAR75	R (Red)	RF (Red)	S (Single)	MB (Mounting Bracket)
	G (Green)	GF (Green)	D (Double)	
	B (Black)	BF (Black)		
		SF (Silver)		

## CONSTRUCTION

The ELCPA75 Series has a thin, low profile construction and photoluminescent lettering. This wire-free exit sign is high durability and visible at 75 feet.


## EMERGENCY OPERATION

Upon failure of the normal utility power the PA75 exit sign will provide at least 90 minutes of illumination. \*The sign must be charged for a minimum of 60 minutes to become fully operational.

## INSTALLATION

Surface, flag or ceiling mounted (mounting hardware included with purchase of frame or bracket). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy.

## DIMENSIONS

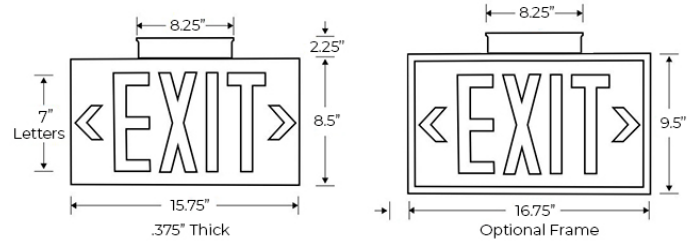

Weight : 7.00 lb

---

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
[info@exitlightco.com](mailto:info@exitlightco.com)