

# LED UP/DOWN LIGHT FIXTURE | WALL MOUNT | CYLINDER DESIGN

Code: ELF-CYN



The ELF-CYN is an up/down LED light fixture that is offered with multiple options. Great for outdoor lighting where looks and designs are important.



## FEATURES

- Wall pack fixture with optional emergency light and battery backup
- CSA Listed for Damp or Wet Location
- Die cast aluminum housing
- UV stabilized polycarbonate lens
- LED Board
- Maintenance-free battery ballast for emergency operation units
- Charge rate / power on indicator and test button with emergency ballast option
- **This product is custom made-to-order with a 2 week lead-time. As such it is final sale and no returns are allowed.**

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

ELF-CYN series is CSA listed and meets or exceeds the following: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment.

## ORDERING INFORMATION

Series	Housing Color	Operation Type	Voltage	Wattage	Color Temperature	Photocell	Optics
ELF-CYN	BZ (Bronze)	LF (Light Fixture Only)	120-277V	29W	4100K	None	30 (30° Up / 30° Down)
	B (Black)	EM (Light with Emergency Ballast)	347-480V	43W		120-277 (120-277V Photocell)	70 (70° Up / 70° Down)
	W (White)			58W			100 (100° Up / 100° Down)

## CONSTRUCTION

Die-cast aluminum housing with built-in heat sinks. Textured architectural bronze powdercoat finish over a chromate conversion coating.

## ILLUMINATION

The ELF-CYN is now designed with an LED board providing 4,300-4,600 lumn. Features a tempered clear flat glass lens and optional wide, medium, or narrow reflectors for optimal and desired lighting.

## ELECTRICAL COMPONENTS

The ELF-CYN is designed to work with 120-277V 50/60Hz or optional 347-480V 50/60Hz systems.

## EMERGENCY OPERATION

In the event of a power failure, the emergency battery ballast option will keep the fixture illuminated for industry standard 90 minutes. Emergency ballast must be selected upon ordering.

## BATTERY - BATTERY BACKUP

The ELF-CYN has the option for a 90-minute battery backup ballast to be installed. In case of a power outage, the wall pack will illuminate for a minimum of 90 minutes. This option is currently only available with the 120-277V operation type.

## PHOTOMETRICS

Mouting heights of 18 to 30 feet can be used based on light level and uniformity requirements.

## OPERATIONAL TEMPERATURE

### Temperature Ratings


Standard Option

-40°F to 122°F

## INSTALLATION

The ELF-CYN is suitable for wall mount over a 4" recessed outlet box.

## DIMENSIONS

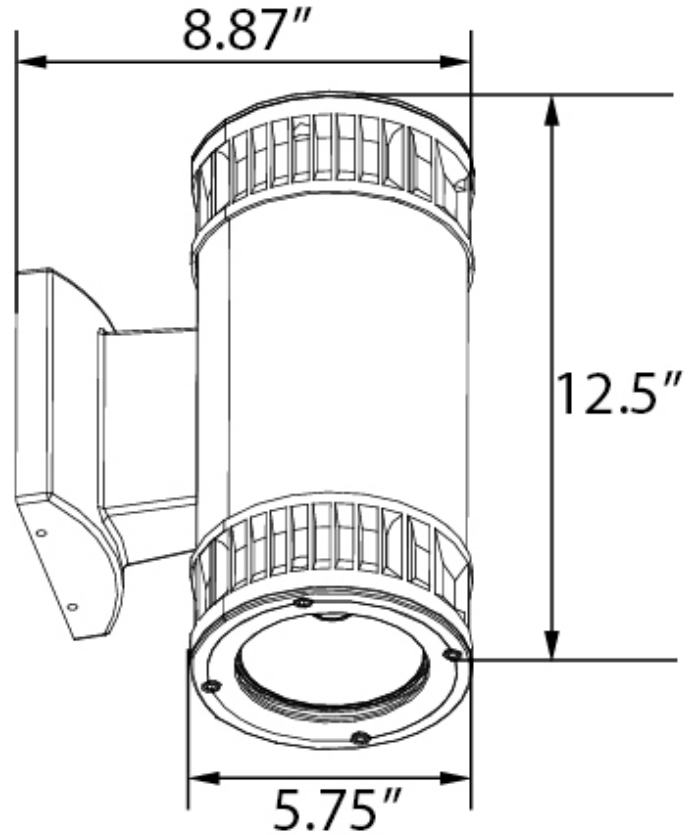

Weight : 20.00 lb

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com