



The LEDJR-U offers a compact modern design and combines the dependability of LED lighting illumination for an attractive and economical package. Featuring field selectable Red/Green LED color and lettering.



**Compatible Battery:** 1.2V 1000mAh Ni-MH

## ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
LEDJR	U (Red/Green)	W (White)	BB (Battery Backup)

## CONSTRUCTION

The LEDJR-U Exit Sign is constructed from injection molded, V-0 flame retardant, high impact thermoplastic housing.

## ELECTRICAL COMPONENTS

Dual voltage input of 120/277VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid-state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

## BATTERY - BATTERY BACKUP

The LEDJR-U Exit Sign is designed with a maintenance-free 1.2V 1000mAh Ni-MH battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code
- Listed for damp location
- Field selectable Red or Green LEDs
- Single or Double Side Configuration
- Push-to-test switch
- 120 or 277 VAC operation
- Injection-molded, VO flame retardant, high impact housing
- Charge rate / power on LED indicator light
- Universal mounting canopy for top or side installation

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The LEDJR-U is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.


## OPERATIONAL TEMPERATURE

Temperature Ratings	
Battery Backup	32°F to 104°F

## INSTALLATION

The LEDJR-U Exit Sign is suitable for surface wall, side, and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage.

## DIMENSIONS

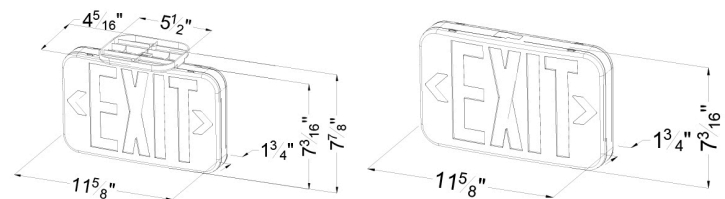

Weight : 0.00 lb

## ELECTRICAL INFORMATION

Series	Input Voltage	Power Consumption	Current	Discharge Duration
LEDJR-U	120/277VAC 60Hz	1W	95mA	90 Minutes