

NYC 8" EXIT SIGN

Code: NYCSR



Rugged Steel New York City Approved Exit Sign. Can be used as single or double sided. Red LED lettering with a white powder coated housing.



Compatible Battery: BAA-48R

ORDERING INFORMATION

Series	Housing Color	Sides	Voltage	Operation Type
NYCSRW (White)	White	Single	120/277V	AC (AC Only)
NYCSRB (Black)	Black	Double		BB (Battery Backup)

FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Damp Location rated
- New York City Approved Exit Sign
- Rugged 20 gauge steel construction
- Universal 120/277 VAC transformer
- Fixture is single or double sided
- Universal knock-out chevrons
- Durable white powder coated finish

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The NYCSR series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

CONSTRUCTION

The NYCSR series exit sign features a rugged 20 gauge steel housing with powder coat finish (High Impact).

ILLUMINATION

The NYCSR series exit sign comes with long life Energy efficient LED.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


BATTERY - BATTERY BACKUP

Uses a Ni-cad 4.8v 700mAh battery provides 90 minute emergency run time (Battery Backup configuration only)

INSTALLATION

The NYCSR series exit sign features a highly configurable design includes additional faceplate (with knock-out left/right chevron arrows) to install fixture as double-sided. Universal mounting kit allows top, side or flush installation.

DIMENSIONS

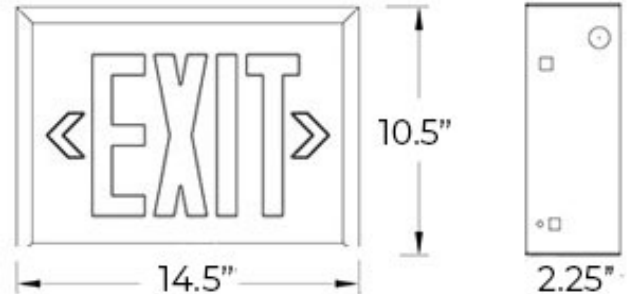

Weight : 10.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com