



PHOTOLUMINESCENT EXIT SIGN - RIGID PLASTIC - RED OR GREEN LETTERS

Code: PAJ



The PAJ exit sign is a power free sign. No electricity, wiring, nor batteries are require.



FEATURES

- UL 924 and NFPA 101 Life Safety Code
- Listed for wet location
- LEED points qualified
- No electricity, no batteries required
- Explosion proof, weatherproof
- Four mounting holes provided
- Requires 54 LUX (5-ft candles) of LED, fluorescent, metal halide or mercury vapor light to charge material for 60 minutes
- Do not expose to direct sunlight
- No future hazmat disposal needed
- Optional Black Frame with mounting holes on back available

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The PAJ series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA, NFPA 101 Life Safety Code, 2009/2012 2015/2018 Code Compliant, IBC/IFC.

ORDERING INFORMATION

Series	Letter Color	Frame
PAJ	R (Red)	BF (Black Frame)
	G (Green)	

CONSTRUCTION

The PAJ Glow in the Dark Exit Sign has a thin, low profile construction with 50' visibility. It has a durable plastic photoluminescent panel with an optional black plastic frame. This photoluminescent exit sign is explosion-proof for areas requiring explosion-proof exit signage.

ELECTRICAL COMPONENTS

The PAJ Series does not use nor require any type of electrical components.


EMERGENCY OPERATION

Upon failure of the normal utility power the PAJ exit sign will provide at least 90 minutes of illumination. *The sign must be charged for a minimum of 60 minutes to become fully operational.

INSTALLATION

This unit is available for surface mount. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, LED, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

DIMENSIONS

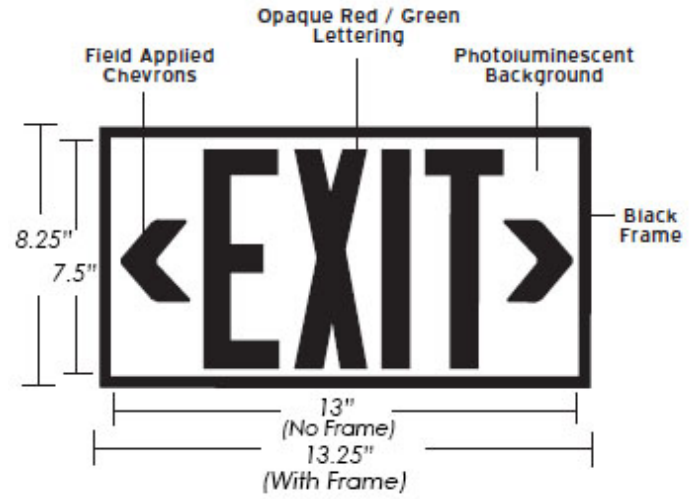

Weight : 4.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com