



50' VIEW PHOTOLUMINESCENT EXIT SIGN - RED, GREEN, OR BLACK HOUSING

Code: PAJP



The PAJP series leads the industry in zero-energy egress systems, these exit signs utilize the latest photoluminescent technology to absorb and store ambient light



FEATURES

- UL 924 and NFPA 101 Life Safety Code
- LEED points qualified
- Zero energy consumption
- Zero maintenance - no bulbs or battery replacement
- Non-toxic, non-radioactive
- Designed for surface, flag, ceiling or conduit mounting
- Consistent, uniform illumination, 50 Foot visibility
- Life Expectancy +25 years
- Operating Temperature 50°F to 104°F

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The PAJP series is UL listed and meets or exceeds the following: UL 924, NFPA 101 Life Safety Code requirements, 2009/2012/2015/2018 Code Compliant, and IBC/IFC.

ORDERING INFORMATION

Series	Housing Color	Sides
PAJP	R (Red)	S (Single Sided)
	G (Green)	D (Double Sided)
	B (Black)	

CONSTRUCTION

The PAJP Series has a thin, low profile construction with ABS plastic paneling and photoluminescent lettering. This wire-free exit sign is high durability, non-toxic, non-radioactive and has a life expectancy of 25+ years.

ILLUMINATION

Provides consistent, uniform illumination at a 50 foot viewing distance.

ELECTRICAL COMPONENTS

The PAJP Exit Sign does not require any type of electrical components.

EMERGENCY OPERATION


Upon failure of the normal utility power the PAJP exit sign will provide at least 90 minutes of illumination.

*The sign must be charged for a minimum of 60 minutes to become fully operational.

INSTALLATION

The PAJP exit sign series is suitable for wall mount, ceiling mount, and side mount. Typical ambient lighting is usually sufficient to charge the exit sign. Ambient light levels at sign location should be measured with a light meter to confirm that 5 foot-candles (54 lux) is present on exit sign face(s). There must be a minimum of 5 foot-candle (54 lux) on exit sign face(s) of LED, fluorescent, metal halide or mercury vapor light.

DIMENSIONS

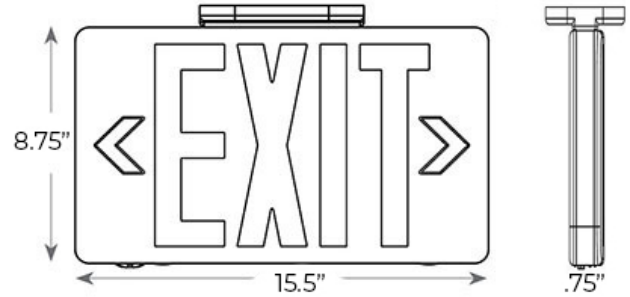

Weight : 8.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com