



FEATURES

- No electricity, no batteries
- Thin gauge polyester film
- Peel-off adhesive backing makes installation easy and low-cost
- Requires 54 LUX (5-ft candles) of LED, fluorescent, metal halide or mercury vapor light to charge material for 60 minutes
- Install indoors only
- Non-toxic and non-radioactive
- High tack tape sticks to rough surfaces
- Long life expectancy
- No future hazmat disposal needed

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



CONSTRUCTION

The PT2 egress tape is made from flexible, photoluminescent polyester film coated with a permanent acrylic adhesive. Engineered to exceed requirements for emergency egress and meet the industry's most rigorous standards.


ELECTRICAL COMPONENTS

The PT2 egress tape does not require any type of electrical components.

INSTALLATION

The PT2 egress tape is designed for indoor safety application such as signage in building, marine, rail, and military applications. The egress tape must be exposed to ambient lighting or natural sunlight. Fluorescent light exposure is the best and fastest charging light.

DIMENSIONS

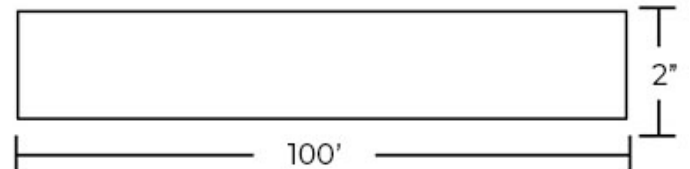

Weight : 9.00 lb