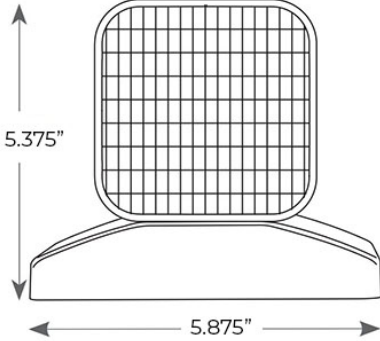
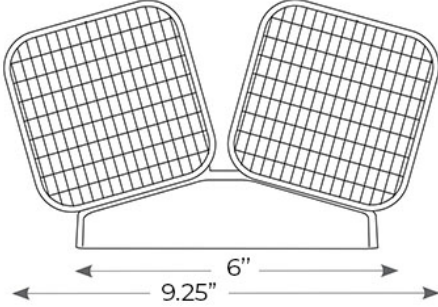
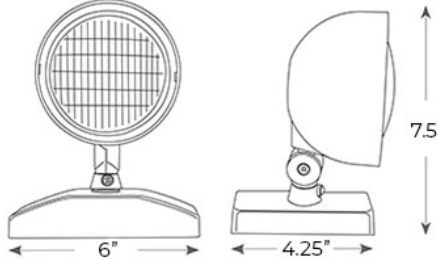


Series	Features	Options	Dimension
RH	<p>Emergency Light Remote Lamp Head Adjustable Lamp Head Indoor User Only Includes Lamp For Use with any remote head capable emergency light or exit sign with matching voltage</p> <p><b>CONSTRUCTION</b> The RH(2) remote head series is constructed from injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic white finish.</p> <p><b>ILLUMINATION</b> Smooth thermoplastic reflector with plastic lens for optimal light distribution. Adjustable lamp heads with 12V wedge base incandescent lamps provides</p>	<p><b>Voltage:</b> 6V or 12V</p> <p><b>Wattage (6V Only):</b> 5.4W, 7.2W, and 9W</p> <p><b>Wattage (12V Only):</b> 7.2W, 9W, 13W, and 18W</p>	
RH2	<p>increased center-to-center spacing.</p> <p><b>ELECTRICAL COMPONENTS</b> Powered from low voltage power source with low voltage wiring (not provided).</p> <p><b>INSTALLATION</b> The RH remote head includes a universal mounting base plate with mounting hardware. The distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run. Suitable for wall or ceiling mount</p>	<p><b>Voltage:</b> 6V or 12V</p> <p><b>Wattage (6V Only):</b> 5.4W, 7.2W, and 9W</p> <p><b>Wattage (12V Only):</b> 7.2W, 9W, 13W, and 18W</p>	
RHR	<p>Emergency Light Remote Lamp Head Adjustable Lamp Head Indoor User Only Includes Lamp For Use with any remote head capable emergency light or exit sign with matching voltage</p> <p><b>CONSTRUCTION</b> The RHR(2) remote head series is constructed from injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic off white finish.</p>	<p><b>Voltage:</b> 6V or 12V</p> <p><b>Wattage (6V Only):</b> 5.4W, 7.2W, and 9W</p> <p><b>Wattage (12V Only):</b> 7.2W, 9W, 13W, and 18W</p>	
RHR2	<p>Smooth chrome-plated metallized reflector with plastic lens for optimal light distribution. Features adjustable lamp heads with 6V wedge base incandescent lamps provide increased center-to-center spacing.</p> <p><b>ELECTRICAL COMPONENTS</b> Powered from low voltage power source with low voltage wiring (not provided).</p> <p><b>INSTALLATION</b> The RHR(2) remote head includes a universal mounting base plate with mounting hardware. The distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run. Suitable for wall or ceiling mount</p>	<p><b>Voltage:</b> 6V or 12V</p> <p><b>Wattage (6V Only):</b> 5.4W, 7.2W, and 9W</p> <p><b>Wattage (12V Only):</b> 7.2W, 9W, 13W, and 18W</p>	