



TRITIUM - SELF LUMINOUS EXIT SIGN

Code: SL-Tritium



An energy efficient exit sign that is explosion proof, weatherproof, wire- and maintenance-free. No batteries or electricity needed!



FEATURES

- UL 924, OSHA and NFPA 101 Life Safety Code, USNRC, ISO 9001
- Listed for wet location
- *** Call for availability of RUSH product ***
- OPERATING TEMPERATURE - 76°F TO +212°F
- Left, right, or no arrow configuration
- Explosion-proof, weatherproof
- Hard plastic housing with red face, no maintenance
- Easy installation, no wires
- Concealed mounting
- Suitable for floor proximity mounting
- 10 or 20 year lifetime
- 100 Ft Viewing Distance
- NRC Regulated product, nonreturnable, non-refundable
- Single or double-sided option

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The SL series is UL listed and meets or exceeds the following: UL 924, OSHA and NFPA 101 Life Safety Code, USNRC, ISO 9001 requirements.

ORDERING INFORMATION

Series	Sign Color	Frame Color	Life Time	Options
SL-Tritium	R (Red)	BF (Black Frame)	10 (10 Years)	SC (Security Cover)
	G (Green)	WF (White Frame)	20 (20 Years)	PM (Pendant Mount Kit)
	B (Black)	BA (Brushed Aluminum)		WG (Wire Guard)
				RM (Recessed Mount)
				PW (Polycarbonate Window)
				IF (Institutional Frame)

Example: ELCSL-Tritium-R-BF-10-PM

CONSTRUCTION

The SL Tritium series is an explosion proof and weatherproof Tritium powerless Exit Sign encased with a high impact, fire-retardant ABS plastic.

ILLUMINATION

The SL Tritium Exit Sign does not illuminate when normal lighting is on in the building. When the power goes out, the sign illuminates bright emergency lighting, more than twice what the Underwriters Laboratories (UL) requires.

ELECTRICAL COMPONENTS

Tritium Exit Signs contain no electrical components. They feature Betalight tubes manufactured from borosilicate (hard) glass internally coated with zinc sulfide phosphor and filled with tritium tubes.

EMERGENCY OPERATION


The SL Tritium exit sign series are always on. Depending on the series ordered, these signs will be on for 10 or 20 years.

INSTALLATION

The SL series installs in minutes. It is suitable for wall mount, ceiling mount, pendant mount*, and recessed mount*.

2 color matching arrow covers are included to cover up desired directional arrow.

*Pendant and Recessed Mount sold separately

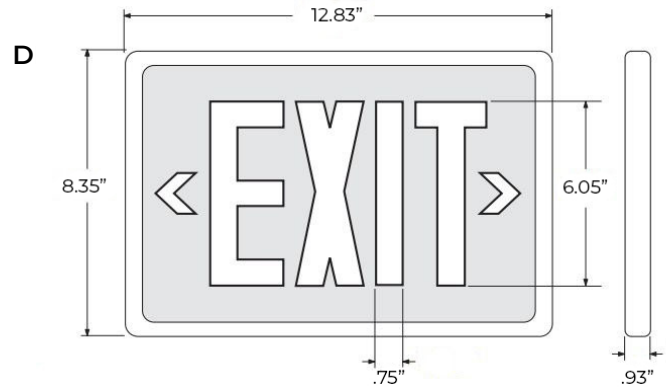

Weight : 3.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com