



WET LOCATION COMBO EXIT SIGN | ADJUSTABLE ROUND LED LAMPS

Code: WLTCOMBO



Ultra bright, compact unit provides the affordability you've been looking for in a highend package, featuring round LED lamps. Standard Temperature ratings 50°F to 104° F (10°C to 40° C)



Compatible Battery: [BAA-3618](#)

Compatible Remote Head(s): RHB-L and RHB-WPL
To use with with remote heads, please change the **Operation Type** above to **Battery Remote Head Capable (3.6V)** to ensure compatibility. Code at time of checkout must read: **WLTCOMBO-R-W-RH**.

FEATURES

- UL 924, NEC, OSHA, NFPA 101 Life Safety Code, and Listed for Wet Locations
- Round LED Lamps
- Maintenance free NiCad battery (Included)
- Fixture can be single or double sided
- Ultra bright LEDs
- Push-to-test switch
- 120 or 277 VAC operation
- Extremely low operating costs
- Removable directional indicators
- 5VA Flame retardant, UV stabilized polycarbonate enclosure
- Optional 3.6V Remote Head Option (Supports two single or one double head)

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our [Warranty Section](#).

Conformance to Codes and Standards

The WLTCOMBO series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Optional Items
WLTCOMBO	R (Red)	White	BB (Battery Backup)	CW (Expanded Temperature Rating)
	G (Green)		RH (Remote Head Capable)	

CONSTRUCTION

The WLTCOMBO series is constructed of 5VA flame retardant, UV stabilized polycarbonate housing. High impact, UV stabilized polycarbonate lens included, some discoloration may occur over time if installed in direct sunlight. Fully gasketed with engineering grade silicone.

ILLUMINATION

The WLTCOMBO series uses ultra bright, energy efficient red or green LEDs. Features 2 fully adjustable LED lamp heads.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The WLTCOMBO series is designed with a maintenance-free NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. The battery is protected by a low voltage cut-off circuit.

PHOTOMETRICS

Suggested mounting height of 7.5ft illuminates 1 footcandle (FC) **spaced at 22ft for a 3ft path of egress.**

Mounting height of 7.5ft illuminates 1 footcandle (FC) **spaced at 18ft for a 6ft path of egress.**

Disclosure:

Spacing is measured in lab condition with an assumed open space, no obstruction and reflection rates of 80 (ceiling) / 50 (walls) / 20 (floor). Actual spacing may vary depending on what environment the fixture is installed in.

OPERATIONAL TEMPERATURE

Temperature Ratings	
Standard Option	50°F to 104°F
Expanded Temperature	-4°F to 122°F


REMOTE HEAD CAPABLE OPTION

The remote head capability option allows the WLTCOMBO unit to supply power to up to two single or one double 3.6V LED remote heads. The remote heads would then operate on the same emergency mode as the standard units. This unit only supports LED remote heads.

INSTALLATION

The WLTCOMBO combination unit is suitable for surface wall and end mounting. Suitable for indoor and wet location installations.

DIMENSIONS

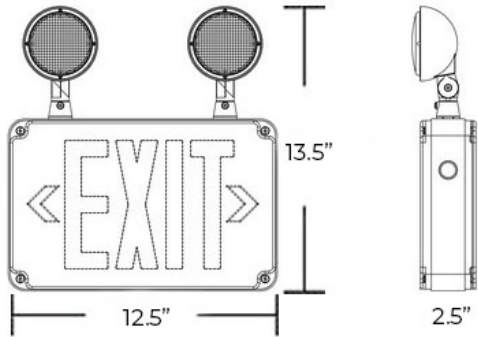

Weight : 10.00 lb

