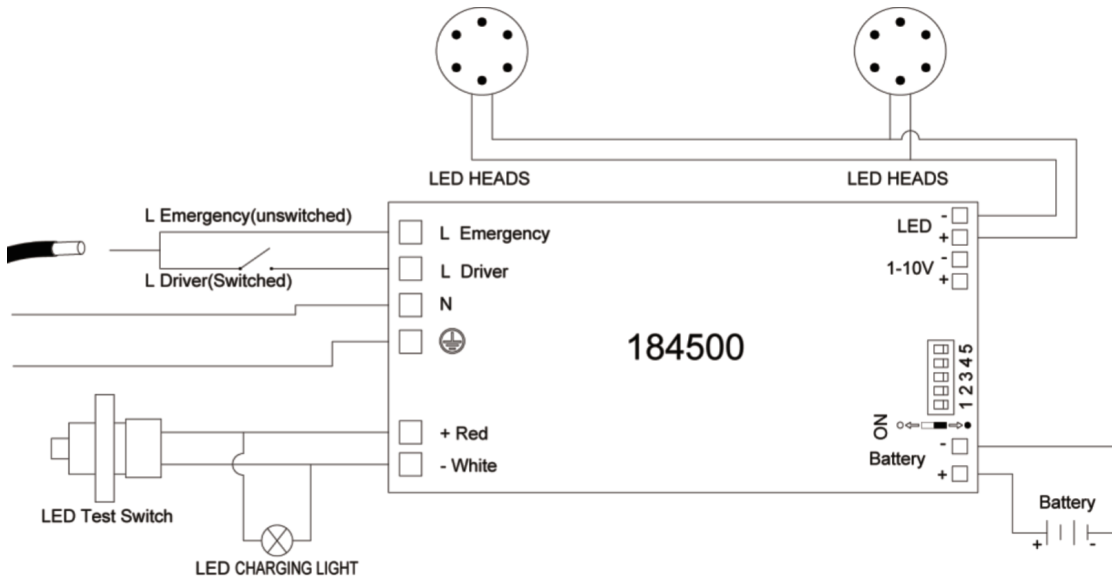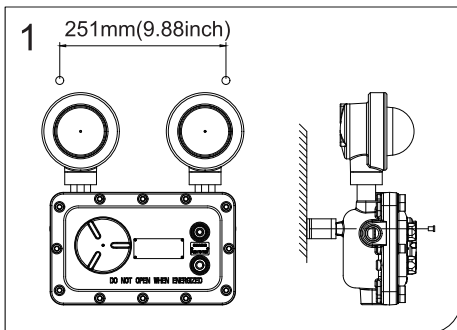# Installation Instructions:
LED Explosion Proof Emergency Light | Class 1 Division 1 | Adjustable Lamp Heads
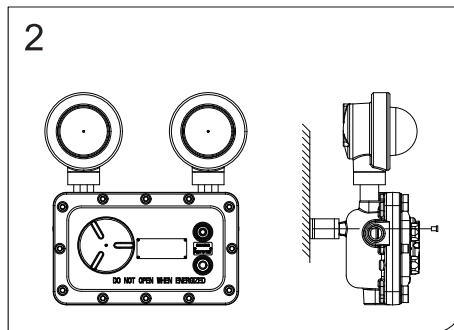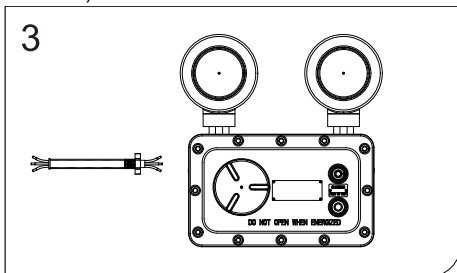
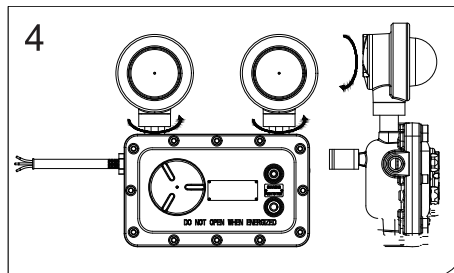## Wiring Diagram:

Wall Mounting

Step 1: Begin by drilling two holes, following the dimensions illustrated in figure 1, with a spacing of 251mm (9.88 inches). Subsequently, secure the lamp to the wall using 7/16" bolts (please note that bolts are not included).

Step 2: Choose one of the three (side or bottom) 3/4" NPT plugs to serve as the conduit hookup point.

Step 3: Begin by taking off the junction box cover (spiral cover) and inserting the power cable into the junction box. Proceed to connect the AC cable, ensuring that the black cable is connected to L, the white cable to N, and the green cable to the grounding terminal. Additionally, fill 16mm of chemical filler into the conduit and secure the conduit to the lamp body, making sure to verify the presence of suitable gaskets before installation.

Step 4: Once installed, make any necessary adjustments to the direction of the headlights according to your requirements.