



# TRITIUM - SELF LUMINOUS EXIT SIGN

Code: SL



An energy efficient exit sign that is explosion proof, weatherproof, wire- and maintenance-free. No batteries or electricity needed!



## FEATURES

- UL 924, OSHA and NFPA 101 Life Safety Code, USNRC, ISO 9001
- Listed for wet location
- OPERATING TEMPERATURE - 76°F TO +212°F
- Left, right, or no arrow configuration
- Explosion-proof, weatherproof
- Hard plastic housing with red face, no maintenance
- Easy installation, no wires
- Concealed mounting
- Suitable for floor proximity mounting
- 10 or 20 year lifetime
- NRC Regulated product, nonreturnable, non-refundable

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The SL series is UL listed and meets or exceeds the following: UL 924, OSHA and NFPA 101 Life Safety Code, USNRC, ISO 9001 requirements.

## ORDERING INFORMATION

Series	Sign Color	Sides	Frame	Options
SLR (Red)	Red	Single	Black	Security Cover
SLG (Green)	Green	Double	White	Mount Kit
SLB (Black)	Black		Aluminum	Wire Guard
				Recessed Mount
				Polycarbonate Window
				Institutional Frame

## CONSTRUCTION

The SL series is an explosion proof and weatherproof Tritium powerless Exit Sign encased with a high impact, fire-retardant ABS plastic.

## ILLUMINATION

The SL Tritium Exit Sign does not illuminate when normal lighting is on in the building. When the power goes out, the sign illuminates bright emergency lighting, more than twice what the Underwriters Laboratories (UL) requires.

## ELECTRICAL COMPONENTS

Tritium Exit Signs contain no electrical components. They feature Betalight tubes manufactured from borosilicate (hard) glass internally coated with zinc sulfide phosphor and filled with tritium tubes.

## EMERGENCY OPERATION


The SL series exit sign are always on. Depending on the series ordered, these signs will be on for 10 or 20 years.

## INSTALLATION

The SL series installs in minutes. It is suitable for wall mount, ceiling mount, pendant mount\*, and recessed mount\*.

\*Pendant and Recessed Mount sold separately

## DIMENSIONS

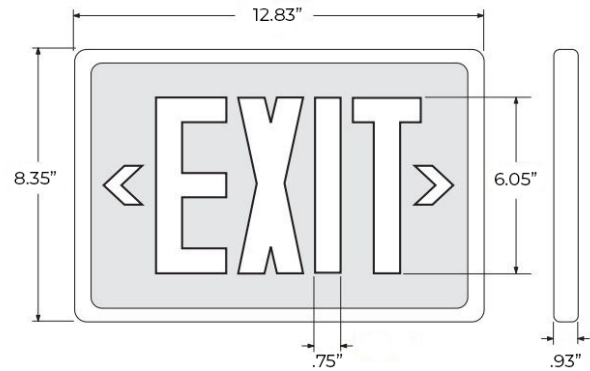

Weight : 3.00 lb

---

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com